


# Respina Compressor SE

Synthetic (Ester) air compressor oil

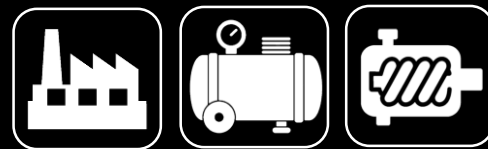

## Description

Respina compressor SE are compressor lubricants developed to cope with the severe operating conditions experienced in turbo-compressors, rotary screw, rotary vane and reciprocating air compressors operating at high compression ratios and high discharge temperatures.

## Specification and Approvals

- DIN 51506 VDL
- ISO 6743-3A DAB
- ISO 6743-3A DAJ

## Advantages & Benefits

- Excellent oxidation stability
- Excellent rust & wear protection
- Excellent corrosion protection
- Extra high-temperature performance
- Reduced deposits formation
- Low foaming / good air release

## Typical Data

Property	SE 46	SE 68	SE 100	Test method
Viscosity at 40°C	46	68	100	ASTM D445
Viscosity at 100°C	7	8.5	10.2	ASTM D445
Viscosity Index	108	99	90	ASTM D2270
Flash Point °C	+280	+286	+278	ASTM D92
Pour Point °C	-42	-36	-30	ASTM D97
Density $kg/m^3$	860	959	960	ASTM D4052

- ❖ Respina Compressor SE oils are formulated and produced in RESPINA LUBRICANTS blending site and presented data is based on standard tests under laboratory conditions and is given as a guide only. These characteristics are typical of current production and acceptable variation may occur.